


***FIXTURES MUST BE INSTALLED ACCORDING TO LOCAL CODES AND N.E.C. BY A QUALIFIED ELECTRICIAN.
MAKE SURE ALL POWER IS DISCONNECTED PRIOR TO INSTALLATION.***

STEM MOUNT / GOOSENECK MOUNT

1. Insert porcelain socket with adapter into fixture. (Porcelain socket is pre-wired and assembled to the adapter) fig.1
2. Slip through gasket over lead wires then the cover nut. IF the "O" ring is included make sure "O" ring is seated properly inside the groove of the cover nut. fig.1
3. Seal all threads with teflon tape to ensure wet location.
4. Attach cover nut to adapter and gasket. (cover nut is reverse thread)
5. Tighten the cover nut firmly.
6. Feed lead wires to stem or gooseneck then thread light fixture.
7. Thread box cover to stem or gooseneck, make wiring connection. Fig.2
8. Place gasket between box and cover then secure cover plate with (4) screws. Fig.2

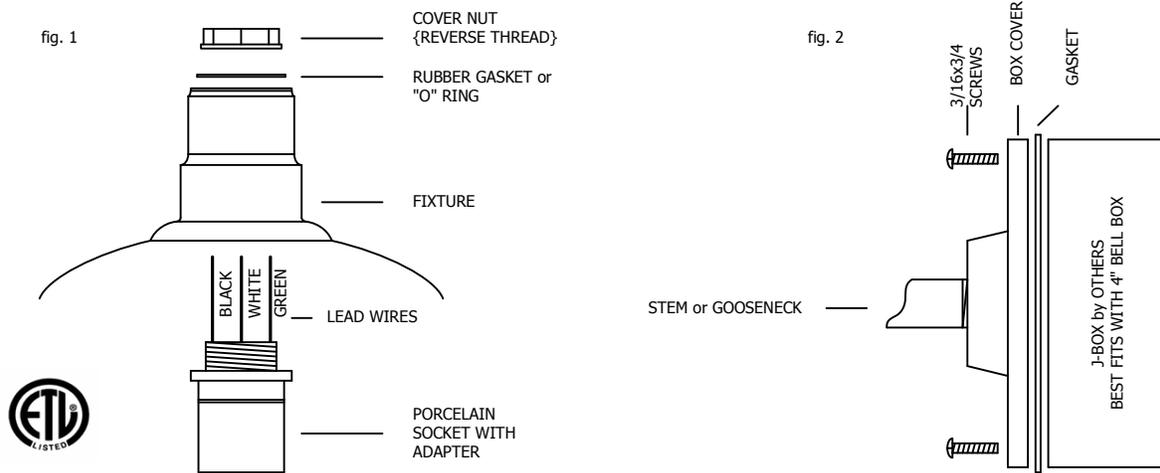

***FIXTURES MUST BE INSTALLED ACCORDING TO LOCAL CODES AND N.E.C. BY A QUALIFIED ELECTRICIAN.
MAKE SURE ALL POWER IS DISCONNECTED PRIOR TO INSTALLATION.***

STEM MOUNT / GOOSENECK MOUNT

1. Insert porcelain socket with adapter into fixture. (Porcelain socket is pre-wired and assembled to the adapter) fig.1
2. Slip through gasket over lead wires then the cover nut. IF the "O" ring is included make sure "O" ring is seated properly inside the groove of the cover nut. fig.1
3. Seal all threads with teflon tape to ensure wet location.
4. Attach cover nut to adapter and gasket. (cover nut is reverse thread)
5. Tighten the cover nut firmly.
6. Feed lead wires to stem or gooseneck then thread light fixture.
7. Thread box cover to stem or gooseneck, make wiring connection. Fig.2
8. Place gasket between box and cover then secure cover plate with (4) screws. Fig.2

