




AR-16

16" RADIAL WAVE 200W MAX. INCANDESCENT

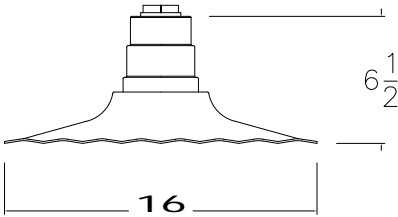

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel, zinc plate and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip.

<p><u>Incandescent</u></p> <input type="checkbox"/> 200W	<p><u>Hub Size</u></p> <input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4"	<p><u>Ceiling Canopy</u></p> <input type="checkbox"/> ACN001	<p><u>Colors & Finishes</u></p> <table border="0"> <tr><td><input type="checkbox"/> 0</td><td>White</td></tr> <tr><td><input type="checkbox"/> 1</td><td>Black</td></tr> <tr><td><input type="checkbox"/> 2</td><td>Blue</td></tr> <tr><td><input type="checkbox"/> 3</td><td>Green</td></tr> <tr><td><input type="checkbox"/> 4</td><td>Dark Bronze</td></tr> <tr><td><input type="checkbox"/> 5</td><td>Yellow</td></tr> <tr><td><input type="checkbox"/> 6</td><td>Red</td></tr> <tr><td><input type="checkbox"/> 8</td><td>Galvanized</td></tr> <tr><td><input type="checkbox"/> 10</td><td>Painted Chrome</td></tr> <tr><td><input type="checkbox"/> 11</td><td>Satin Copper</td></tr> <tr><td><input type="checkbox"/> 12</td><td>Satin Nickel</td></tr> <tr><td><input type="checkbox"/> 15</td><td>Painted Copper</td></tr> <tr><td><input type="checkbox"/> 22</td><td>Unfinished</td></tr> </table>	<input type="checkbox"/> 0	White	<input type="checkbox"/> 1	Black	<input type="checkbox"/> 2	Blue	<input type="checkbox"/> 3	Green	<input type="checkbox"/> 4	Dark Bronze	<input type="checkbox"/> 5	Yellow	<input type="checkbox"/> 6	Red	<input type="checkbox"/> 8	Galvanized	<input type="checkbox"/> 10	Painted Chrome	<input type="checkbox"/> 11	Satin Copper	<input type="checkbox"/> 12	Satin Nickel	<input type="checkbox"/> 15	Painted Copper	<input type="checkbox"/> 22	Unfinished
<input type="checkbox"/> 0	White																												
<input type="checkbox"/> 1	Black																												
<input type="checkbox"/> 2	Blue																												
<input type="checkbox"/> 3	Green																												
<input type="checkbox"/> 4	Dark Bronze																												
<input type="checkbox"/> 5	Yellow																												
<input type="checkbox"/> 6	Red																												
<input type="checkbox"/> 8	Galvanized																												
<input type="checkbox"/> 10	Painted Chrome																												
<input type="checkbox"/> 11	Satin Copper																												
<input type="checkbox"/> 12	Satin Nickel																												
<input type="checkbox"/> 15	Painted Copper																												
<input type="checkbox"/> 22	Unfinished																												
<p><u>Intregal Ballast.</u> Globe is required for wet location.</p> <input type="checkbox"/> 13CF-120 <input type="checkbox"/> 18CF-120 <input type="checkbox"/> 26CFT-120 <input type="checkbox"/> 32CFT-120	<p><u>Mounting Options</u></p> <p><u>Cord Mount</u></p> <input type="checkbox"/> P430 (4FT WHT cord) <input type="checkbox"/> P431 (4FT BLK cord) ___ " Specify Length	<p><u>Ball Aligner for stem mount</u> <u>Slope Ceiling 3/4" hub w/ 1/2" reducer</u></p> <input type="checkbox"/> ACN002 (Round) <input type="checkbox"/> ACN003 (Square)																											
<p><u>Remote ballast.</u> Globe is required for wet location.</p> <input type="checkbox"/> 26CFT-UNV <input type="checkbox"/> 32CFT-UNV <input type="checkbox"/> 42CFT-UNV	<input type="checkbox"/> stem ___ " Length	<p><u>HD box cover for stem mount</u> <u>Flat Ceiling</u></p> <input type="checkbox"/> ACN004-1/2 <input type="checkbox"/> ACN004-3/4 <input type="checkbox"/> ACN008 (1/2) <input type="checkbox"/> ACN009 (1/2) <input type="checkbox"/> ACN010 (3/4)																											
<p><u>Remote ballast.</u> Globe is required for wet location.</p> <input type="checkbox"/> 35W HPS <input type="checkbox"/> 50W HPS <input type="checkbox"/> 70W HPS <input type="checkbox"/> 100W HPS <input type="checkbox"/> 150W HPS	<p><u>Gooseneck w/ HD box wall plate</u></p> <input type="checkbox"/> AGB24-ELW <input type="checkbox"/> AGB101 <input type="checkbox"/> AGB102 <input type="checkbox"/> AGB103 <input type="checkbox"/> AGB104 <input type="checkbox"/> AGB105 <input type="checkbox"/> AGB106 <input type="checkbox"/> AGB107 <input type="checkbox"/> AGB110 <input type="checkbox"/> AGB111 <input type="checkbox"/> AGB141 <input type="checkbox"/> AGB148 <input type="checkbox"/> AGB1535	<p><u>Globe & Guard</u></p> <input type="checkbox"/> AVX100DG Clear globe & guard <input type="checkbox"/> AVX100GL Clear globe <input type="checkbox"/> AVX100GLO Frost globe <input type="checkbox"/> AVX100PRIS Prismatic Globe																											
<p><u>Remote ballast.</u> Globe is required for wet & dry location or open fixture with MP socket.</p> <input type="checkbox"/> 50W MH	<p><u>Wall bracket w/ ballast box</u></p> <input type="checkbox"/> AWM-204RTE	<p><u>Globe & Guard</u> <u>For 42W CFL, 50 MH & 100 - 150W HPS</u></p> <input type="checkbox"/> AVX200DG Clear globe & guard <input type="checkbox"/> AVX200GL Clear globe <input type="checkbox"/> AVX200GLO Frost globe <input type="checkbox"/> AVX200PRIS Prismatic Globe																											
<p><u>LED</u></p> <input type="checkbox"/> 15W <input type="checkbox"/> 20W <input type="checkbox"/> 34W	<p><u>Wall bracket</u></p> <input type="checkbox"/> AWM-204 <input type="checkbox"/> AWM-206 <input type="checkbox"/> AWM-207	<p><u>Remote box</u></p> <input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor																											
	<p><u>Pole mount</u> (specify slip fitter size)</p> <input type="checkbox"/> APB201 <input type="checkbox"/> APB202 <input type="checkbox"/> APB203 <input type="checkbox"/> APB204 <input type="checkbox"/> APB206 <input type="checkbox"/> APB207 <input type="checkbox"/> APB207-2X																												
	<input type="checkbox"/> 2" slip fitter <input type="checkbox"/> 3" slip fitter		<p><u>Accessories</u> <u>Colored Cap</u></p> <input type="checkbox"/> ACC-002																										

JOBNAME: _____

SPECIFIER: _____

