




AC-12

12" CLASSIC DOME 150W Max. INC

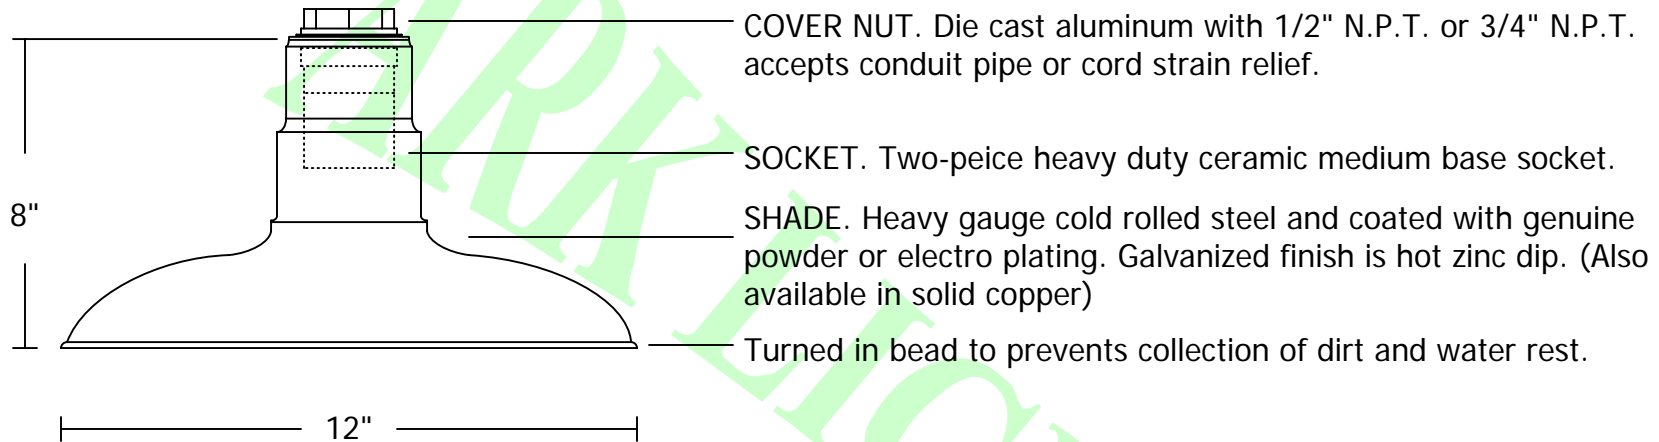

ACCESSORIES AND OTHER OPTIONS

- Wireguard, globe & guard
 - 26W & 32W Fluorescent 120V (ballast mounted inside the neck, globe option is required for outdoor use)
 - 35 to 100W High pressure sodium (remote ballast, globe option is required for outdoor use)
 - 50 to 150W Metal halide (remote ballast, globe is required or use MP rated lamp for open fixture)
- NOTE: 150W MH option must use large globe

FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 10=unfinish, 11=solid copper, 12=satin aluminum, 15=painted 20=solid copper & 21=solid brass

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN


ETL LISTED FOR WET LOCATION





AC-12

12" CLASSIC DOME 1500W MAX.



COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel, zinc plate and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip.

<u>Incandescent</u> <input type="checkbox"/> 150W	<u>Hub Size</u> <input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4"	<u>Ball Aligner for stem mount</u> <u>Slope Ceiling 3/4" hub w/ 1/2" reducer</u> <input type="checkbox"/> ACN002 (Round) <input type="checkbox"/> ACN003 (Square)	<u>Colors & Finishes</u> <input type="checkbox"/> 0 White <input type="checkbox"/> 1 Black <input type="checkbox"/> 2 Blue <input type="checkbox"/> 3 Green <input type="checkbox"/> 4 Dark Bronze <input type="checkbox"/> 5 Yellow <input type="checkbox"/> 6 Red <input type="checkbox"/> 7 Yellow Zinc <input type="checkbox"/> 8 Galvanized <input type="checkbox"/> 10 Painted Chrome <input type="checkbox"/> 11 Satin Copper <input type="checkbox"/> 12 Satin Nickel <input type="checkbox"/> 15 Painted Copper <input type="checkbox"/> 20 Solid Copper <input type="checkbox"/> 21 Solid Brass <input type="checkbox"/> 22 Unfinished
<u>Intregal Ballast.</u> Globe is required for wet location. <input type="checkbox"/> 13CF-120 <input type="checkbox"/> 18CF-120 <input type="checkbox"/> 26CFT-120 <input type="checkbox"/> 32CFT-120	<u>Mounting Options</u> <u>Cord Mount</u> <input type="checkbox"/> P430 (4FT WHT cord) <input type="checkbox"/> P431 (4FT BLK cord) ___ " Specify Length <input type="checkbox"/> stem ___ " Length	<u>HD box cover for stem mount</u> <u>Flat Ceiling</u> <input type="checkbox"/> ACN009 (1/2) <input type="checkbox"/> ACN010 (3/4)	<u>Accessories</u> <u>Colored Cap</u> <input type="checkbox"/> ACC-002 <u>Wireguard</u> <input type="checkbox"/> AG112
<u>Remote ballast.</u> Globe is required for wet location. <input type="checkbox"/> 26CFT-UNV <input type="checkbox"/> 32CFT-UNV	<u>Gooseneck w/ HD box wall plate</u> <input type="checkbox"/> AGB24-ELW <input type="checkbox"/> AGB101 <input type="checkbox"/> AGB101-48L <input type="checkbox"/> AGB102 <input type="checkbox"/> AGB103 <input type="checkbox"/> AGB104 <input type="checkbox"/> AGB105 <input type="checkbox"/> AGB106 <input type="checkbox"/> AGB107 <input type="checkbox"/> AGB110 <input type="checkbox"/> AGB111 <input type="checkbox"/> AGB141 <input type="checkbox"/> AGB1535	<u>Globe & Guard</u> <input type="checkbox"/> AVX100DG Clear globe & guard <input type="checkbox"/> AVX100GL Clear globe <input type="checkbox"/> AVX100GLO Frost globe <input type="checkbox"/> AVX100PRIS Prismatic Globe	<u>Globe & Guard</u> <u>For 70 & 100W HPS</u> <input type="checkbox"/> AVX200DG Clear globe & guard <input type="checkbox"/> AVX200GL Clear globe <input type="checkbox"/> AVX200GLO Frost globe <input type="checkbox"/> AVX200PRIS Prismatic Globe
<u>Remote ballast.</u> Globe is required for wet location. <input type="checkbox"/> 35W HPS <input type="checkbox"/> 50W HPS <input type="checkbox"/> 70W HPS <input type="checkbox"/> 100W HPS	<u>Wall bracket w/ ballast box</u> <input type="checkbox"/> AGB204-WM	<u>Globe & Guard</u> <u>For 70 & 100W HPS</u> <input type="checkbox"/> AVX200DG Clear globe & guard <input type="checkbox"/> AVX200GL Clear globe <input type="checkbox"/> AVX200GLO Frost globe <input type="checkbox"/> AVX200PRIS Prismatic Globe	<u>Remote box</u> <input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor
<u>Remote ballast.</u> Globe is required for wet & dry location or open fixture with MP socket. <input type="checkbox"/> 50W MH	<u>Wall bracket</u> <input type="checkbox"/> AWM-207	<u>Remote box</u> <input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor	
<u>Remote ballast.</u> Open fixture only <input type="checkbox"/> 70W MH <input type="checkbox"/> 100W MH	<u>Pole mount</u> (specify slip fitter size) <input type="checkbox"/> APB201 <input type="checkbox"/> APB202 <input type="checkbox"/> APB203 <input type="checkbox"/> APB204 <input type="checkbox"/> APB206 <input type="checkbox"/> APB207-2X <input type="checkbox"/> 2" slip fitter <input type="checkbox"/> 3" slip fitter		

JOBNAME: _____

SPECIFIER: _____



1435 West 139th Street Gardena, CA 90249 Tel: 310-323-2275 Fax: 310-323-6275

Website : www.arklighting.com Email : info@arklighting.com