




AH-16

16" SELF BALLASTED SHADE 200W Max. INC

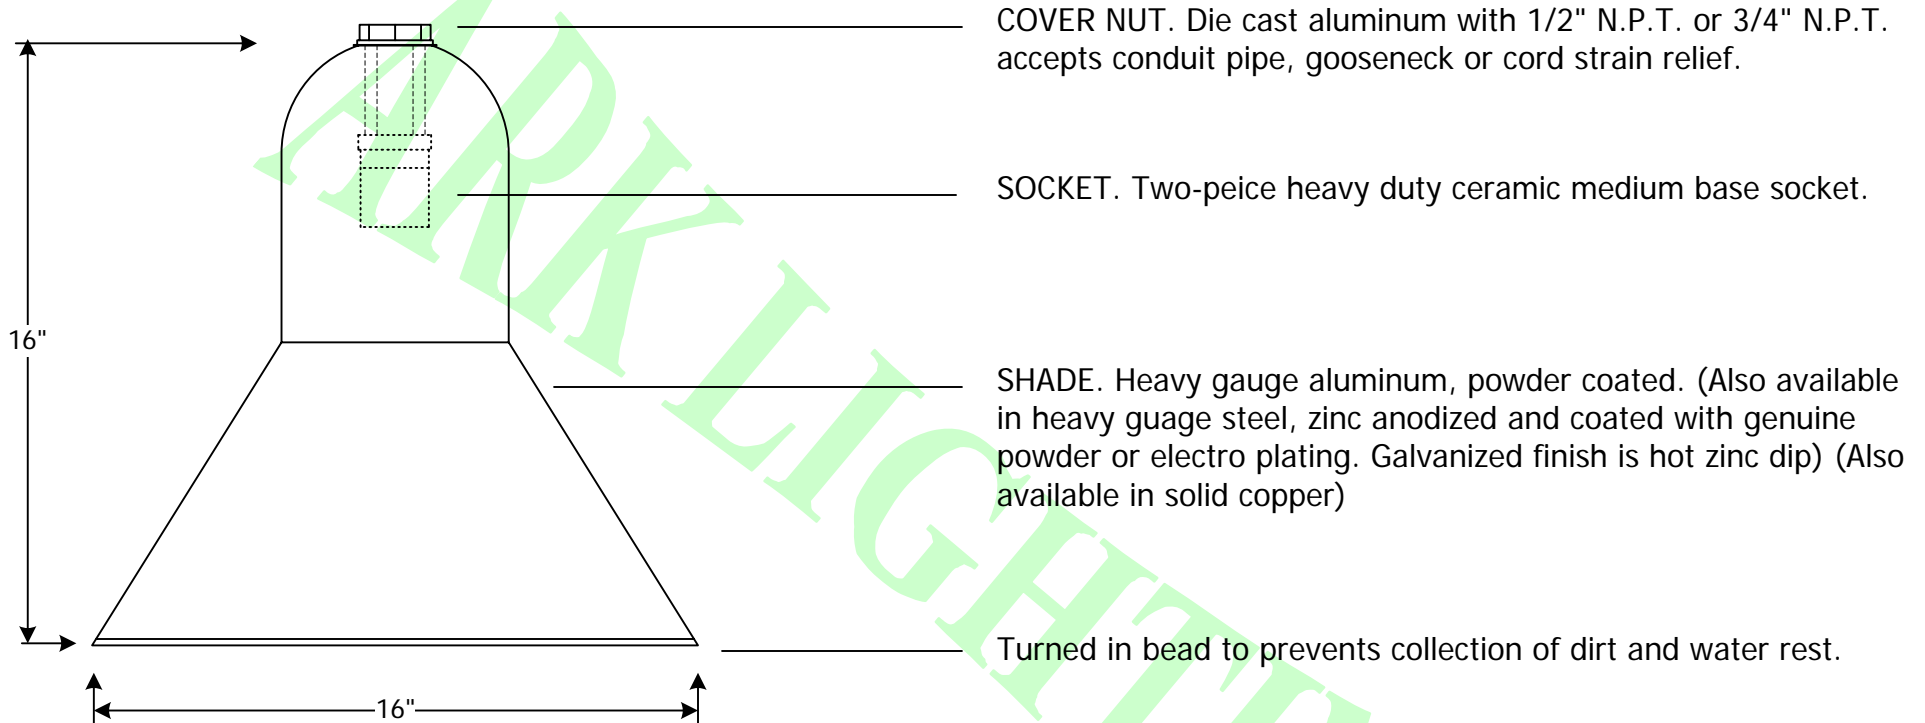

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe, gooseneck or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge aluminum, powder coated. (Also available in heavy gauge steel, zinc anodized and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip) (Also available in solid copper)

Turned in bead to prevents collection of dirt and water rest.

ACCESSORIES AND OTHER OPTIONS

- Bottom lens or globes
 - 26W, 32W, & 42W 120 or 277V Fluorescent (ballast mounted inside the neck, globe or lens option is required for outdoor use)
 - 35 to 150W High pressure sodium (ballast mounted inside the neck, globe or lens option is required for outdoor use)
 - 50 to 175W Metal halide (ballast mounted inside the neck, globe or lens required or use MP rated lamp for open fixture)
- NOTE: 42W CF, 150W HPS, 150W MH option must use large globe

FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 10=unfinish, 11=sa copper, 12=satin aluminum, 15=painted 20=sld copper & 21=sld brass

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ETL LISTED FOR WET LOCATION

