




# AS-14

## 14" STANDARD DOME 150W Max. INC

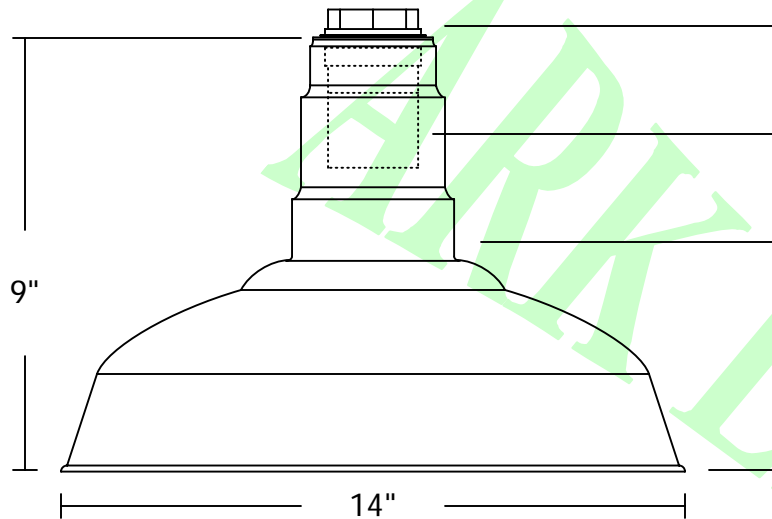

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe, gooseneck or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel zinc anodized and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (also available in solid copper)

Turned in bead to prevents collection of dirt and water rest.

### ACCESSORIES AND OTHER OPTIONS

- Wireguard, globe & guard
  - 26W & 32W Fluorescent 120V (ballast mounted inside the neck, globe option is required for outdoor use)
  - 35 to 100W High pressure sodium (remote ballast, globe option is required for outdoor use)
  - 50 to 150W Metal halide (remote ballast, globe options is required or use MP rated lamp for open fixture)
- NOTE: 150W MH option must use large globe

### FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 10=unfinish, 11=sa copper, 12=satin aluminum, 15=painted 20=sld copper & 21=sld brass

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ETL LISTED FOR WET LOCATION

