


## 18" STANDARD DOME

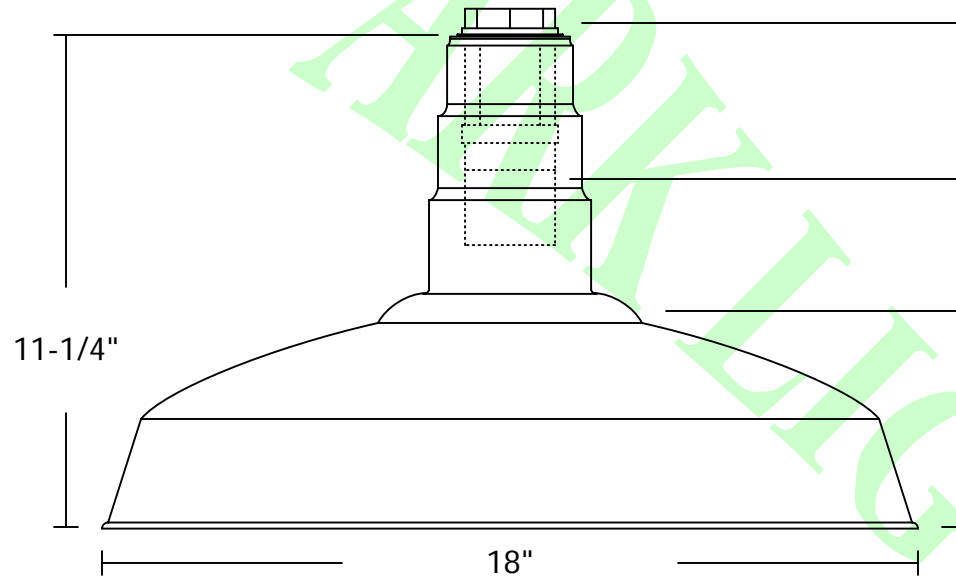

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe, gooseneck or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket, 4KV rated 600W

SHADE. Heavy gauge cold rolled steel, zinc anodize and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (also available in solid copper)

Turned in bead to prevents collection of dirt and water rest.

### ACCESSORIES AND OTHER OPTIONS

- Wireguard & globe and guard
- 26W, 32W, & 42W Fluorescent (ballast mounted inside the neck, must have globe if use outdoor and food area) (use large globe for 42W CF)
- 35 to 150W High pressure sodium (remote ballast, must have globe if use outdoor)
- 50 to 1750W Metal halide (remote ballast, must have globe or use MP rated lamp for open fixture)
- Note: 42W CF, 150W HPS, 150W MH & 175W MH option is must use large globe.

### FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 10=unfinish, 11=sa copper, 12=satin aluminum, 15=painted 20=sld copper & 21=sld brass

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ETL LISTED FOR WET LOCATION

