




AS-20

20" STANDARD DOME 300W Max. INC

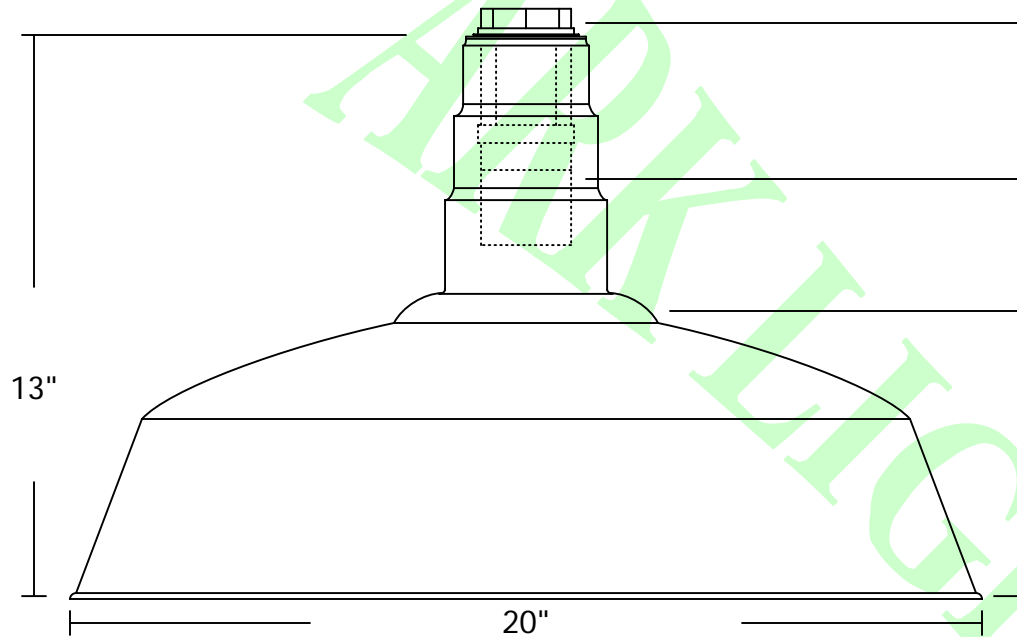

COVER NUT. Die cast aluminum with 1/2" N.P.T. or 3/4" N.P.T. accepts conduit pipe, gooseneck or cord strain relief.

SOCKET. Two-piece heavy duty ceramic medium base socket.

SHADE. Heavy gauge cold rolled steel, zinc anodized and coated with genuine powder or electro plating. Galvanized finish is hot zinc dip. (Also available in solid copper)

Turned in bead to prevents collection of dirt and water rest.

ACCESSORIES AND OTHER OPTIONS

- Wireguard
 - 26W, 32W, & 42W Fluorescent (ballast mounted inside the neck, globe option is required for outdoor use)
 - 35 to 150W High pressure sodium (remote ballast, globe option is required for outdoor use)
 - 50 to 175W Metal halide (remote ballast, globe options is required or use MP rated lamp for open fixture)
- Note: 42W CF, 150W HPS, 150W MH & 175W MH option must use large globe

FINISHES

0=white, 1=black, 2=blue, 3=green, 4=dark bronze, 5=yellow, 6=red, 8=galvanized, 10=unfinish, 11=sa copper, 12=satin aluminum, 15=painted 20=sld copper & 21=sld brass

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ETL LISTED FOR WET LOCATION



1435 West 139TH Street Gardena, CA 90249 Tel: 310-323-2275 Fax: 310-323-6275

Website :www.arklighting.com Email :info@arklighting.com